

# spidocook™



# SPIDOGLOSS™

# SPIDOFLAT™

## SPIDOGLOSS™


### SINGLE GRILL



	BLACK SMOOTH SURFACES	
	SP 010 P	SP 010 E
Control	MANUAL	DIGITAL
Plate size	N°1 250 x 250 mm	N°1 250 x 250 mm
Frequency	50 / 60 Hz	50 / 60 Hz
Voltage	230 V~ 1N	230 V~ 1N
Power	1,5 kW	1,5 kW
Maximum temperature	400 °C	350 °C
Dimensions w x d x h	331 x 458 x 176	331 x 458 x 176
Packaging dimensions w x d x h	373 x 535 x 265	373 x 535 x 265
Net weight	10 Kg	10 Kg
Gross weight	11,1 Kg	11,1 Kg
EAN Code	8029212015499	8029212015451
Qty per pallet	24	24


### MEDIUM GRILL



	SP 015 P	SP 015 
Control	MANUAL	MANUAL
Plate size	N°1 400 x 300 mm	N°1 400 x 300 mm
Frequency	50 / 60 Hz	50 / 60 Hz
Voltage	230 V~ 1N	230 V~ 1N
Power	3 kW	2 kW
Maximum temperature	400 °C	400 °C
Dimensions w x d x h	481 x 457 x 182	481 x 457 x 182
Packaging dimensions w x d x h	540 x 527 x 254	540 x 527 x 254
Net weight	14,9 Kg	14,9 Kg
Gross weight	16 Kg	16 Kg
EAN Code	8029212016472	8029212016465
Qty per pallet	12	12

### DOUBLE GRILL



	SP 020 P	SP 020 	SP 020 E
Control	MANUAL	MANUAL	DIGITAL
Plate size	N°2 250 x 250 mm	N°2 250 x 250 mm	N°2 250 x 250 mm
Frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Voltage	230 V~ 1N	230 V~ 1N	230 V~ 1N
Power	3 kW	2 kW	3 kW
Maximum temperature	400 °C	400 °C	350 °C
Dimensions w x d x h	619 x 458 x 176	619 x 458 x 176	619 x 458 x 176
Packaging dimensions w x d x h	665 x 535 x 265	665 x 535 x 265	665 x 535 x 265
Net weight	17 Kg	17 Kg	17 Kg
Gross weight	19,4 Kg	19,4 Kg	19,4 Kg
EAN Code	8029212015581	8029212015543	8029212015550
Qty per pallet	12	12	12

## SPIDOFLAT™



	BLACK SMOOTH SURFACES
	SP 200
Control	MANUAL
Plate size	N°1 280 x 440 mm
Frequency	50 / 60 Hz
Voltage	230 V~ 1N
Power	2,5 kW
Maximum temperature	400 °C
Dimensions w x d x h	398 x 654 x 128
Packaging dimensions w x d x h	450 x 700 x 170
Net weight	10 Kg
Gross weight	12 Kg
EAN Code	8029212015697
Qty per pallet	16

The ECO versions are custom designed to reduce the installed power (2kW instead of 3kW) and to offer further energy savings in their use, maintaining the performance characteristics. They are particularly suitable even for those installations where there are limits in the total power available.



BLACK SURFACES, TOP RIBBED, LOWER SMOOTH		TRANSPARENT SMOOTH SURFACES	
SP 010 PR	SP 010 ER	SP 010 PT	SP 010 ET
MANUAL	DIGITAL	MANUAL	DIGITAL
N° 1 250 x 250 mm	N° 1 250 x 250 mm	N° 1 250 x 250 mm	N° 1 250 x 250 mm
50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
230 V~ 1N	230 V~ 1N	230 V~ 1N	230 V~ 1N
1,5 kW	1,5 kW	1,5 kW	1,5 kW
400 °C	350 °C	400 °C	350 °C
331 x 458 x 176	331 x 458 x 176	331 x 458 x 176	331 x 458 x 176
373 x 535 x 265	373 x 535 x 265	373 x 535 x 265	373 x 535 x 265
10 Kg	10 Kg	10 Kg	10 Kg
11,1 Kg	11,1 Kg	11,1 Kg	11,1 Kg
8029212015505	8029212015468	8029212015536	8029212015482
24	24	24	24

SP 015 PR	SP 015 R ECO	SP 015 PT	SP 015 T ECO
MANUAL	MANUAL	MANUAL	MANUAL
N° 1 400x300 mm	N° 1 400x300 mm	N° 1 400 x 300 mm	N° 1 400x 300 mm
50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
230 V~ 1N	230 V~ 1N	230 V~ 1N	230 V~ 1N
3 kW	2 kW	3 kW	2 kW
400 °C	400 °C	400 °C	400 °C
481x457x182	481 x 457 x 182	481 x 457 x 182	481 x 457x 182
540x527x254	540 x 527 x 254	540 x 527 x 254	540 x 527 x 254
14,9 Kg	14,9 Kg	14,9 Kg	14,9 Kg
16 Kg	16 Kg	16 Kg	16 Kg
8029212016489	8029212016502	8029212016496	8029212016519
12	12	12	12

SP 020 PR	SP 020 R ECO	SP 020 ER	SP 020 PT	SP 020 T ECO	SP 020 ET
MANUAL	MANUAL	DIGITAL	MANUAL	MANUAL	DIGITAL
N° 2 250 x 250 mm	N° 2 250 x 250 mm	N° 2 250 x 250 mm	N° 2 250 x 250 mm	N° 2 250 x 250 mm	N° 2 250 x 250 mm
50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
230 V~ 1N	230 V~ 1N	230 V~ 1N	230 V~ 1N	230 V~ 1N	230 V~ 1N
3 kW	2 kW	3 kW	3 kW	2 kW	3 kW
400 °C	400 °C	350 °C	400 °C	400 °C	350 °C
619x458x176	619 x 458 x 176	619 x 458 x 176	619 x 458 x 176	619 x 458 x 176	619 x 458 x 176
665x535x265	665 x 535 x 265	665 x 535 x 265	665 x 535 x 265	665 x 535 x 265	665 x 535 x 265
17 Kg	17 Kg	17 Kg	17 Kg	17 Kg	17 Kg
19,4 Kg	19,4 Kg	19,4 Kg	19,4 Kg	19,4 Kg	19,4 Kg
8029212015604	8029212015642	8029212015567	8029212015635	8029212015659	8029212015574
12	12	12	12	12	12

## SPIDOFLAT™



\*Product sold without cable and power plug

### BLACK SMOOTH SURFACES

	SP 300*
Control	MANUAL
Plate size	N° 2 280 x 440 mm
Frequency	50 / 60 Hz
Voltage	230 V~ 1N / 400 V~ 3N
Power	5 kW
Maximum temperature	400 °C
Dimensions w x d x h	693 x 654 x 129
Packaging dimensions w x d x h	710 x 760 x 170
Net weight	17 Kg
Gross weight	18,4 Kg
EAN Code	8029212015703
Qty per pallet	18

## SpidoClean™



### DB1046A0

Spray detergent

Qty per code	1 box
Bottles per box	12
Qty per bottle	750 ml

# CALDOLUX™ & CALDOBAKE™



CALDOLUX™	
SCH 030	
Capacity	N.º3 GN 1/1
Pitch	67 mm
Voltage	230 V ~ 1N
Frequency	50 / 60 Hz
Power	0,76 kW
Cooking maximum temperature	120 °C
Holding maximum temperature	100 °C
Dimensions (w x d x h)	436 x 645 x 409
Packaging dimensions (w x d x h)	530 x 720 x 480
Net weight	21 Kg
Gross weight	23 Kg
EAN Code	8029212015826
Qty per pallet	8



CALDOBAKE™ S3	
SF 003	
Capacity (mm)	3 - 342x242
Pitch	70 mm
Voltage	230 V~ 1N
Frequency	50 / 60 Hz
Power	2,7 kW
Maximum temperature	30 °C - 260 °C
Dimensions w x d x h (mm)	480x523x402
Packaging dimensions w x d x h	610x520x418
Net weight	16 Kg
Gross weight	19 Kg
EAN Code	8029212016106
Qty per pallet	10



CALDOBAKE™ L3	
SF 013	
Capacity (mm)	3 - 460x330
Pitch	70 mm
Voltage	230 V~ 1N
Frequency	50 / 60 Hz
Power	2,7 kW
Maximum temperature	30 °C - 260 °C
Dimensions w x d x h (mm)	600x587x402
Packaging dimensions w x d x h	668x640x418
Net weight	20 Kg
Gross weight	23 Kg
EAN Code	8029212016113
Qty per pallet	8



CALDOBAKE™ L4	
SF 023	
Capacity (mm)	4 - 460x330
Pitch	75 mm
Voltage	230 V~ 1N
Frequency	50 / 60 Hz
Power	3 kW
Maximum temperature	30 °C - 260 °C
Dimensions w x d x h (mm)	600x587x472
Packaging dimensions w x d x h	668x640x488
Net weight	22 Kg
Gross weight	25 Kg
EAN Code	8029212016120
Qty per pallet	8

# Trays and grids


## CALDOLUX™



### CALDOLUX ORIGINAL TRAYS

	Model	Height	
Stainless steel GN 1/1 tray	TG 805	h 20 mm	
Stainless steel GN 1/1 tray	TG 815	h 40 mm	
Stainless steel GN 1/1 tray	TG 825	h 65 mm	
Perforated stainless steel GN 1/1 tray	TG 810	h 20 mm	
Perforated stainless steel GN 1/1 tray	TG 820	h 40 mm	
Perforated stainless steel GN 1/1 tray	TG 830	h 65 mm	
Stainless steel GN 1/1 flat grids	GRP 806	h 40 mm	

## CALDOBAKE™

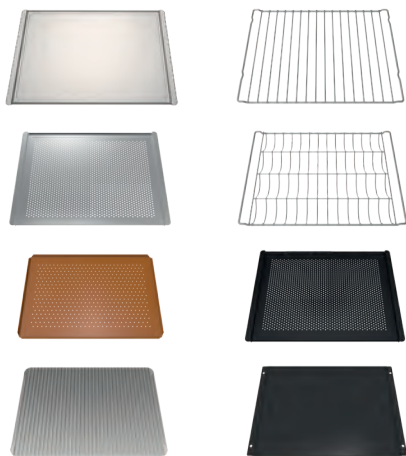

### CALDOBAKE L3-L4

430x330

	Model	
<b>BAKE</b> Aluminium pan	TG 305	
<b>CHROMO GRID</b> Flat chromium plated wire grid	GRP 305	
<b>FORO.BAKE</b> Non-stick perforated aluminium pan	TG 310	
<b>BAGUETTE.GRID</b> Chromium grid	GRP 310	
<b>FORO.SILICO</b> Silicone coated perforated aluminium pan	TG 315	
<b>FORO.BLACK</b> Perforated aluminium pan	TG 330	
<b>FAKIRO™</b> Aluminium plate with 2 sides	TG 335	
<b>PAN.FRY</b> Enamelled pan	TG 350	

### CALDOBAKE S3

342x242

	Model	
<b>BAKE</b> Aluminium pan	TG 205	
<b>CHROMO GRID</b> Flat chromium plated wire grid	GRP 205	





**spidocook**<sup>TM</sup>  
PROFESSIONAL BY DESIGN

**Spidocook<sup>TM</sup> S.r.l.**

Via dell'Artigianato n°2  
35010 Vigodarzere (PD) Italy  
info@spidocook.com  
www.spidocook.com

Printed: 10-2019

**Sales Conditions: Packaging included - VAT not included.**

All images used are for illustrative purposes only  
All information indicated in this catalogue may be subject to change and could be updated without notice.